

SPX424

max 2400 kg

max 3150 x 780 x 1950 mm

max 15 m

max 12 m

The top of the range mini crane.
The most performing mini crane currently on the market.
Technology, innovation and reliability enclosed in the best-seller mini crane ever.




Technical Information

Dimension	L x W x H	3150 x 780 x 1950 mm
Stab Area		4150 x 4150 mm

Crane & Options Weights		Kg
	SPX424CDH	2030
	SPX424C+	2130
	/	200
	2.5T-D7	20
	PP400-4DX	45
	PP220-4DX	
	PP220-2DX	
	JIB800GX	20
	JIB800.1MX	80
	JIB800.2H1MX	180
	MV600.3E+	180
	MR800.4-6+4P	250


SPX424CDH	Petrol Engine	KUBOTA D722-E3B	14.9 kW 20 Hp
SPX424C+	Standard or Lithium Battery	N.4 BATTERIES 6V, 420Ah	4.0 kW 5.5 Hp

Speed		1.8 km/h (CDH) 0.72 km/h (C+)
Gradability		20°
Ext. Tracks		770-1065 mm

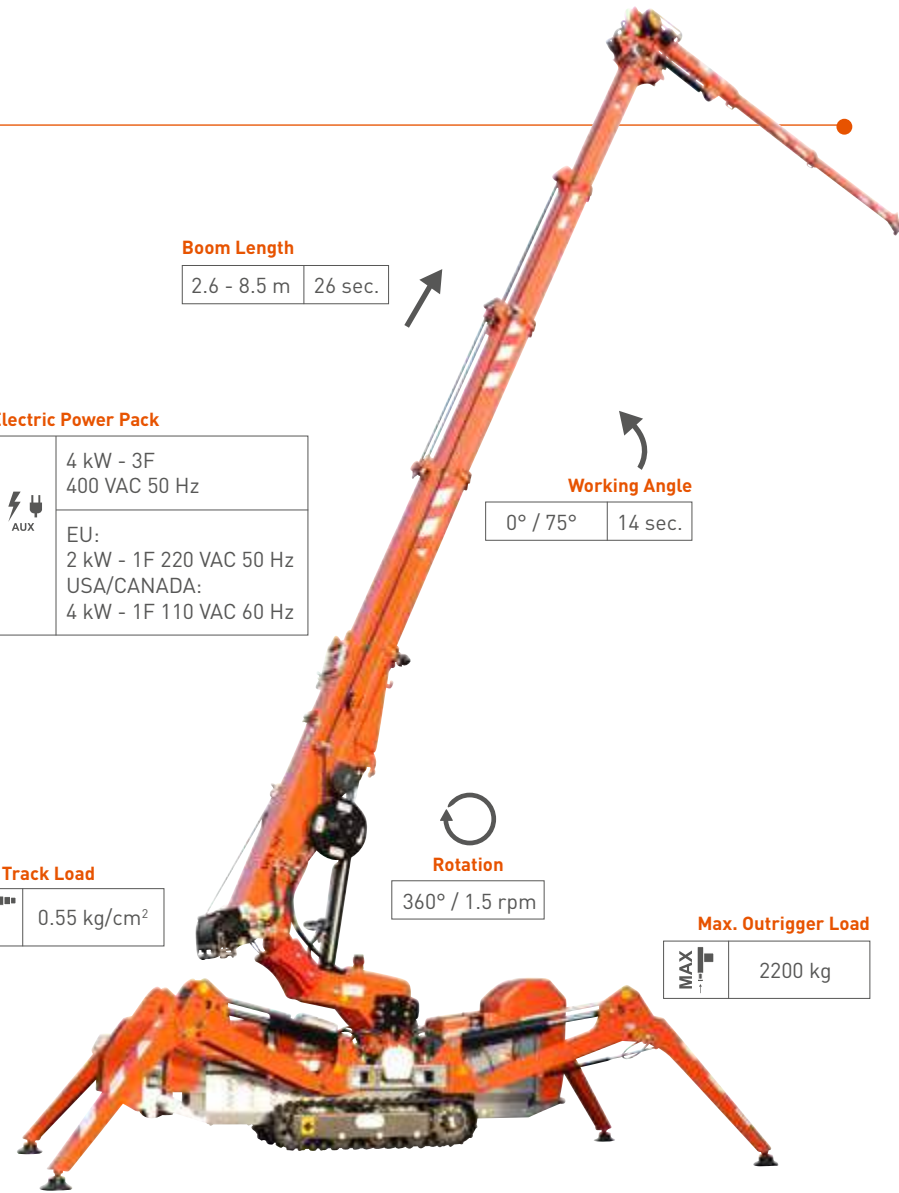


Winch & Fall Stages

Main Winch	800 kg (Single line) 70 m - Ø 7 mm 26-31,8 m/min.
------------	---

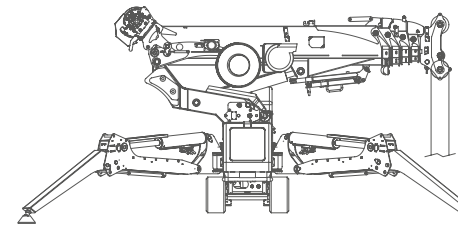


Max. Capacity	Line	Metres
max 2400 kg	3	-20 m
max 1600 kg	2	-32 m
max 800 kg	1	-65 m

Load Chart

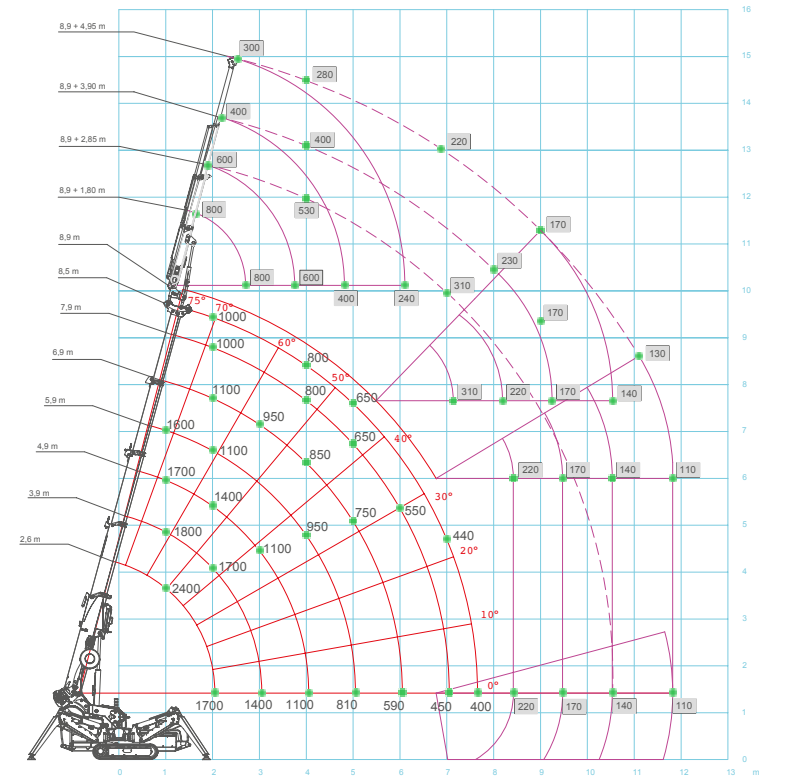

Dimensions

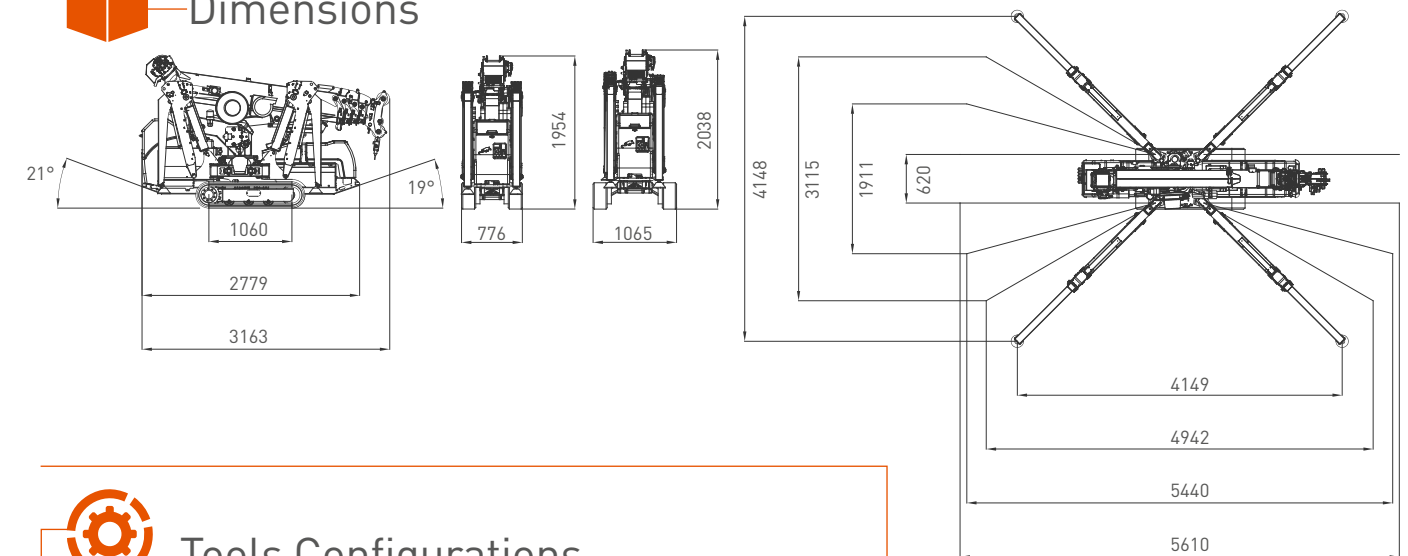

Crane Options

Options:

- HA-SPX424
- VAI
- RC-SPX_B
- RC-SPX_C
- JIB800GX
- JIB800.2H1MX
- JIB800.1MX
- QC-MV600A
- QC-MR800D
- MV600.3E+
- MR800.4-6+4P
- PP400-4DX
- PP220-2DX
- PP220-4DX
- OM400
- WUK-02
- 2.5T-D7-D7
- EXT-209/312/424
- WT-2007242

Accessories: A2B, BPI, CCI, DTC, EXT, GSC, LMI, PaC, PPA, SCI, TH, VW, RCD, 2SW, 2ST

Tools Configurations

	JIB800GX	JIB800.1MX	JIB800.2H1MX	MV600.3E+	MR800.4-6+4P
max	800 kg	800 kg	800 kg	600 kg	800 kg
max	800 kg @ 10 m	500 kg @ 13 m	300 kg @ 15 m	600 kg @ 10,5 m	650 kg @ 10.5 m
max	300 kg @ 8.5 m	120 kg @ 11 m	110 kg @ 12 m	160 kg @ 8.5 m	200 kg @ 7 m